





**EL VEHICULO MULTIOSOS QUE FACILITA TU TRABAJO  
THE TOOL-CARRIER THAT MAKES YOUR WORK EASIER  
MULTITASK-GERÄTETRÄGER, DAS FAHRZEUG FÜR DEN HARTEN EINSATZ  
LE VEHICULE MULTISERVICE QUI FACILITE TON TRAVAIL**

**MULTI  
TASK**



**M 300 H\_2500 Kg**

**AUSA**

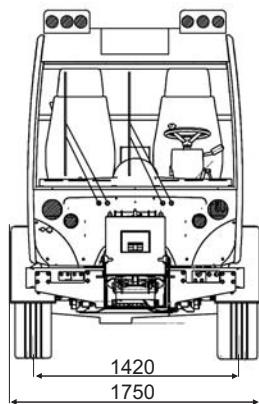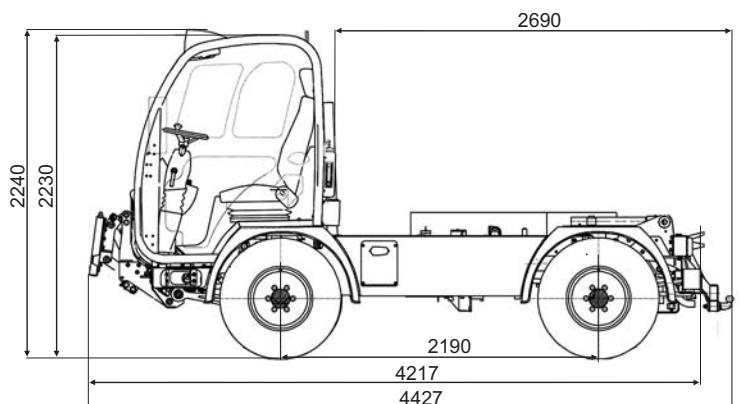

### TECHNICAL SPECIFICATIONS

<b>Load capacity (kg)</b>	2500	<b>Gradient negotiable (with full load)</b>	45%
Hopper capacities (l)	Levelled Heaped	Brakes	Hydraulic pump with servobrake on front wheels with self-ventilated discs and drum discs on rear wheels. (with parking brake)
Engine	Make Type Power acc. (Kw - Cv) N. of cylinders Cooling Fuel	Steering	Hydraulically assisted TRW
Fuel capacity (l)	70	Suspension	Front axle with springs and hydraulic shock absorbers. Rear axle with helicoidal leaf springs and hydraulic shock absorvers
Transmission	2 hydrostatic gear 2 gear speed-reducer	Attack	Obstruction angle Departure angle
Ground speed (Km/h)	62	Weight (Kg)	26° 62°
Traction	4x4 continuous with central differential, COMPEN system	Unloaded weight Gross weight	3230 (1900 front axle ; 1330 rear axle) 5500 (2250 front axle ; 3750 rear axle)
		Hydraulic delivery	Steering pump 12 l/min. Service pump 1: 35 l/min ; Service pump 2: 60 l/min
		Hydraulic power take-off	8 front, 6 rear. Max. pressure 180 bar / Max. flow 60 l/min

### STANDARD EQUIPMENT

Closed cabin with heating	Doors with panning visibility	Passenger seat with pneumatic suspension	Heated rear mirrors elect. adjustable
Electronic boost of rpm	Front plate for attachments	Homologated light system elect. adjustable	Rotating beacon

### OPTIONAL EQUIPMENT

All-terrain, mixed or wide turf tyres	Towing point (Ø 50mm)	Air conditioning	-
Spare wheel	Homologated "Rockinger" towing point	Tachometer	-

### ACCESSORIES

<b>Sweeper</b>	3m3: 650 liters of water; 13.000 m3/h; maximum sweep width: 2.8 m
<b>Movex platform</b>	working height: 15m; load on basket: 200 Kg (2 persons); rotation: 360°
<b>Bush cutter</b>	Lateral bush cutter; Reach: 3 m
<b>Washing bar</b>	Water tank: 2000 l; pressure: 150 bar; flow: 17 l; washing width: 2m

### TRANSPORT

<b>Transport box</b>	Standard box. Dimensions of 1.600 x 2.640 x 300 mm ( width x length x height ) Short standard box. Dimensions of 1.850 x 2200 x 300 mm ( width x length x height ) Loading capacity of 2.500 Kg.
<b>Towing</b>	Dimensions: 1.700 x 2.700 x 400 mm ( width x length x height ) and loading capacity of 3.500 Kg.
<b>Trilateral</b>	Standard trilateral: Dimensions: 1.700 x 2.600 x 400 mm ( width x length x height ) Short standard trilateral: 1.850 x 2.200 x 400 mm ( width x length x height ). Unloading angles at 3 directions up to 46° and loading capacity of 2500 Kg.
<b>Container-holder</b>	Maximum dimensions of the transport loading: 1.220 x 2.400 mm ( width x length ) and loading capacity of 2.500 Kg. ( Distance between arms: 1.360 mm )

### PACKS

<b>SNOW PACK</b>  Snowplough blade with a sweeper width of 2 m. and lateral inclination up to 30°.  Regulable salt-spreader with a capacity of 1.2 m3. Optional: gravitational salt-spreader	<b>SUPPORT PACK</b>  Palfinger crane with a capacity of 280 Kg. at a height of 8.10 metres.  Optional: Unique homologated crane in the market to be used as elevator-people. Basket with remote control. Able to elevate 1 person and tools (120 Kg) at a working height of 10.7 metres.