
## K-100 SERIES









KENWORTH

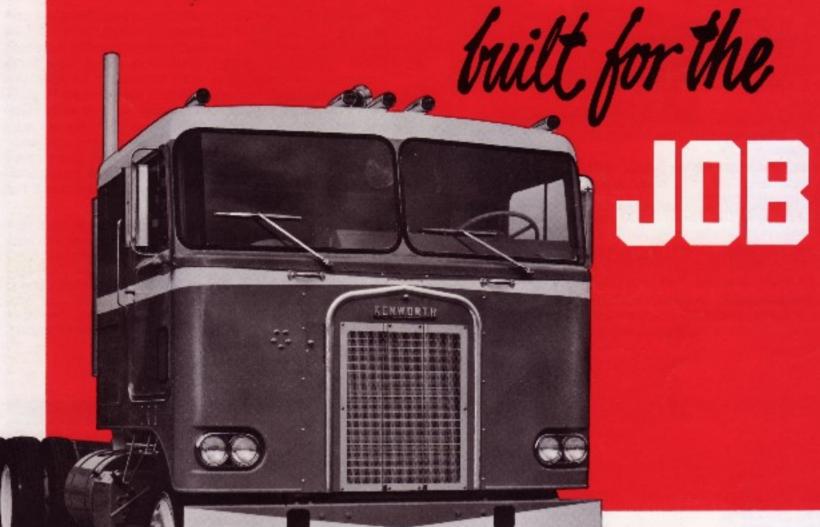


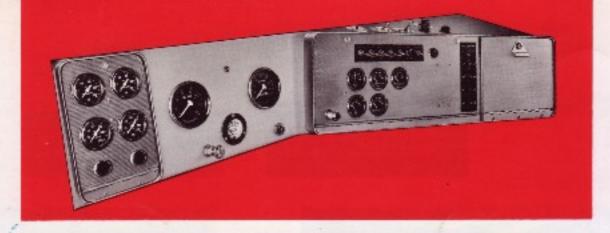

Tilt-out instrument panels, Easily serviced. Ample circuit breaker capacity. Nylon-tied wiring. Dust-proof, moisture resistant instruments, Service recorder space.



Fuel tanks are side-mounted on the frame. At Kenworth you may choose from varying capacities and locations.




High efficiency radiators of 991 and 1,177 sq. in. frontal areas for today's high output engines.



Reduce service costs with Kenworth's easily operated tilt cab, tilting to 75 degrees. Aluminum liner over engine compartment facilitates cleaning.



Threaded steel-to-steel pins and bushings in front springs last longer, eliminate side movement.



Dual reservoir tanks of ample capacity help to make Kenworth braking the safest, fastest acting, most trouble-free available.



Bulkhead door features continuous door frame and weather stripping, plus piano-type hinges.

## KENWORTH MOTOR TRUCK COMPANY

HOME OFFICE: SEATTLE, WASHINGTON 98124, U.S.A., AREA CODE 206, RO 2-0101—FACTORIES AT SEATTLE; KANSAS CITY, MISSOURI; VANCOUVER, B.C.; MEXICALI, MEXICO—DISTRIBUTORS IN THE U.S.A. AND MANY FOREIGN COUNTRIES